



Steg 1. Öppna din webbläsare (ex. Internet Explorer) och skriv in `http://192.168.1.1` tryck Enter.

Tryck på "Run Wizard"

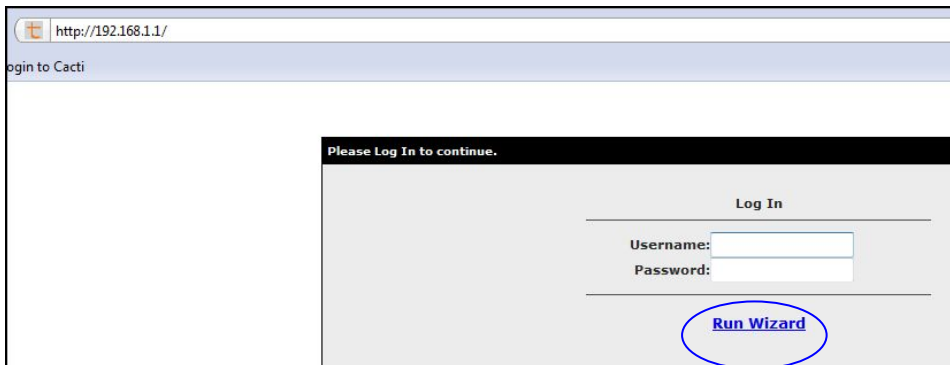


The screenshot shows a web browser window with the address bar containing `http://192.168.1.1/`. The page title is "Login to Cacti". A black banner at the top of the content area says "Please Log In to continue.". Below this is a "Log In" section with two input fields: "Username:" and "Password:". At the bottom of the login form, a blue button labeled "Run Wizard" is circled in blue.

Steg 2. Välj "English" och tryck på "Next"

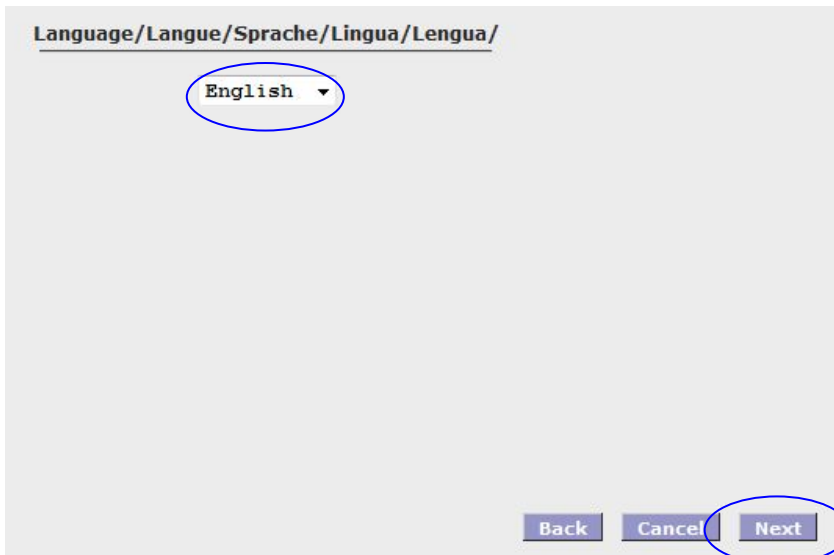

The screenshot shows a language selection screen with the heading "Language/Langue/Sprache/Lingua/Lengua/". A dropdown menu is open, showing "English" with a downward arrow, and this option is circled in blue. At the bottom of the screen, there are three buttons: "Back", "Cancel", and "Next". The "Next" button is circled in blue.

Steg 3. Ange koden **3241** i rutan nedan och tryck på "Next"

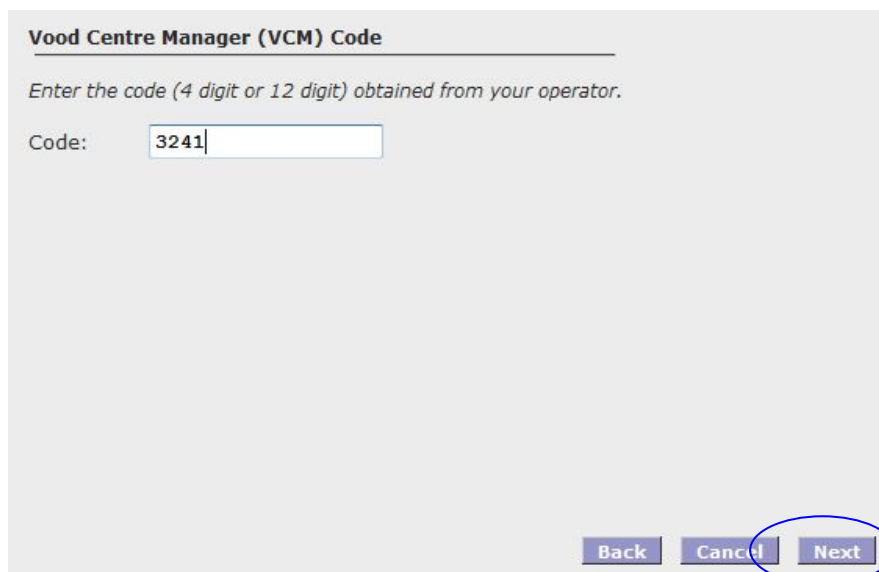


Vood Centre Manager (VCM) Code

Enter the code (4 digit or 12 digit) obtained from your operator.

Code:

Steg 4. Välj "DHCP" under rubriken Choose Connection Type, "LLC" under rubriken Encapsulation och ange VPI **8** och VCI **35** i rutorna under rubriken Virtual Channel Path.

Tryck sedan på "Next"

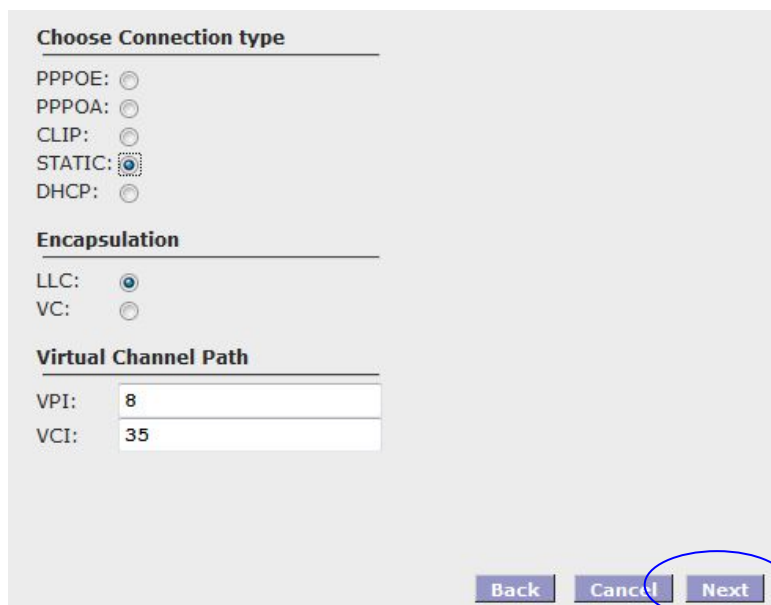

Choose Connection type

PPPOE:
PPPOA:
CLIP:
STATIC:
DHCP:

Encapsulation

LLC:
VC:


Virtual Channel Path

VPI:
VCI:

Steg 5. Skriv i de uppgifter som finns på första sidan i detta brev i rutorna "IP Address", "Netmask", "Gateway".

Klicka sedan på "Next".

OBS! Exempelsiffror nedan, dina siffror finns på sidan 1

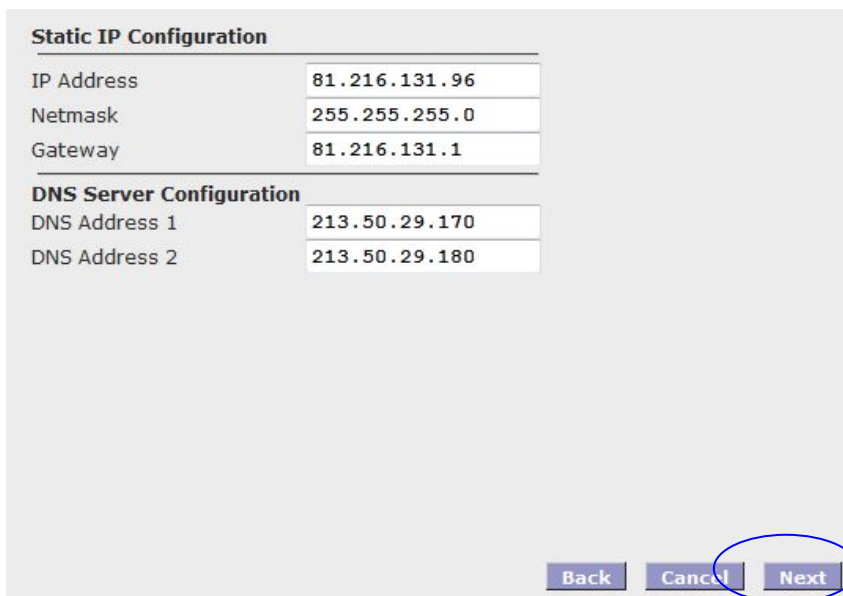

The image shows a configuration window with two sections. The first section, "Static IP Configuration", contains three input fields: "IP Address" with the value "81.216.131.96", "Netmask" with "255.255.255.0", and "Gateway" with "81.216.131.1". The second section, "DNS Server Configuration", contains two input fields: "DNS Address 1" with "213.50.29.170" and "DNS Address 2" with "213.50.29.180". At the bottom right, there are three buttons: "Back", "Cancel", and "Next". The "Next" button is circled in blue.

Static IP Configuration	
IP Address	81.216.131.96
Netmask	255.255.255.0
Gateway	81.216.131.1


DNS Server Configuration	
DNS Address 1	213.50.29.170
DNS Address 2	213.50.29.180

Steg 6. Klicka på "Activate" för att komma vidare.



The image shows a row of three buttons: "Back", "Cancel", and "Activate". The "Activate" button is circled in blue.

Steg 7. Vänta det antal minuter som visas i rutan under Activating changes.

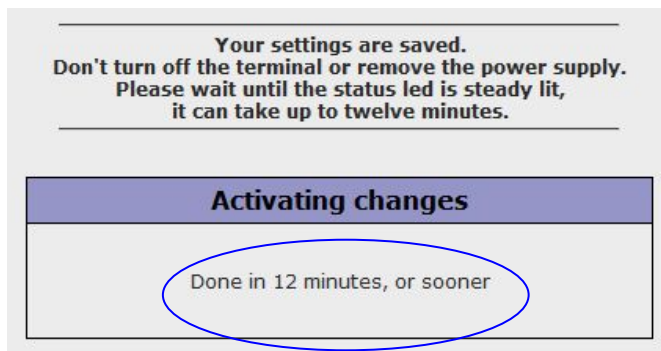

OM det inte fungerar efter tiden löpt ut, starta då om modemmet vänta i cirka 5 minuter och prova igen.

OM det fortfarande inte fungerar måste du göra en fabriksåterställning och köra guiden ovan en gång till!

För att återställa modemmet måste du använda dig av en spetsig penna eller ett gem.

1. Stick in det spetsiga föremålet på baksidan av modemmet i hålet som heter "reset" håll inne i cirka 10 sekunder.
2. Då lamporna till höger på modemmet börjar lysa fast. Släpp då efter och lyssna efter ett "klick".
3. Vänta i cirka 5 minuter innan du kör guiden ovan igen.